




# Intel® Server Board SHG2

High-Performance Intel® Xeon™ Processor-Based  
Server Board for Departmental and Internet Solutions

## Product Brief

- Supports Dual Intel® Xeon™ Processors with 512KB Level 2 Advanced Transfer Cache
- Triple-Peer PCI Buses with PCI-X Support
- Up to 12 GB of ECC DDR200/266 SDRAM

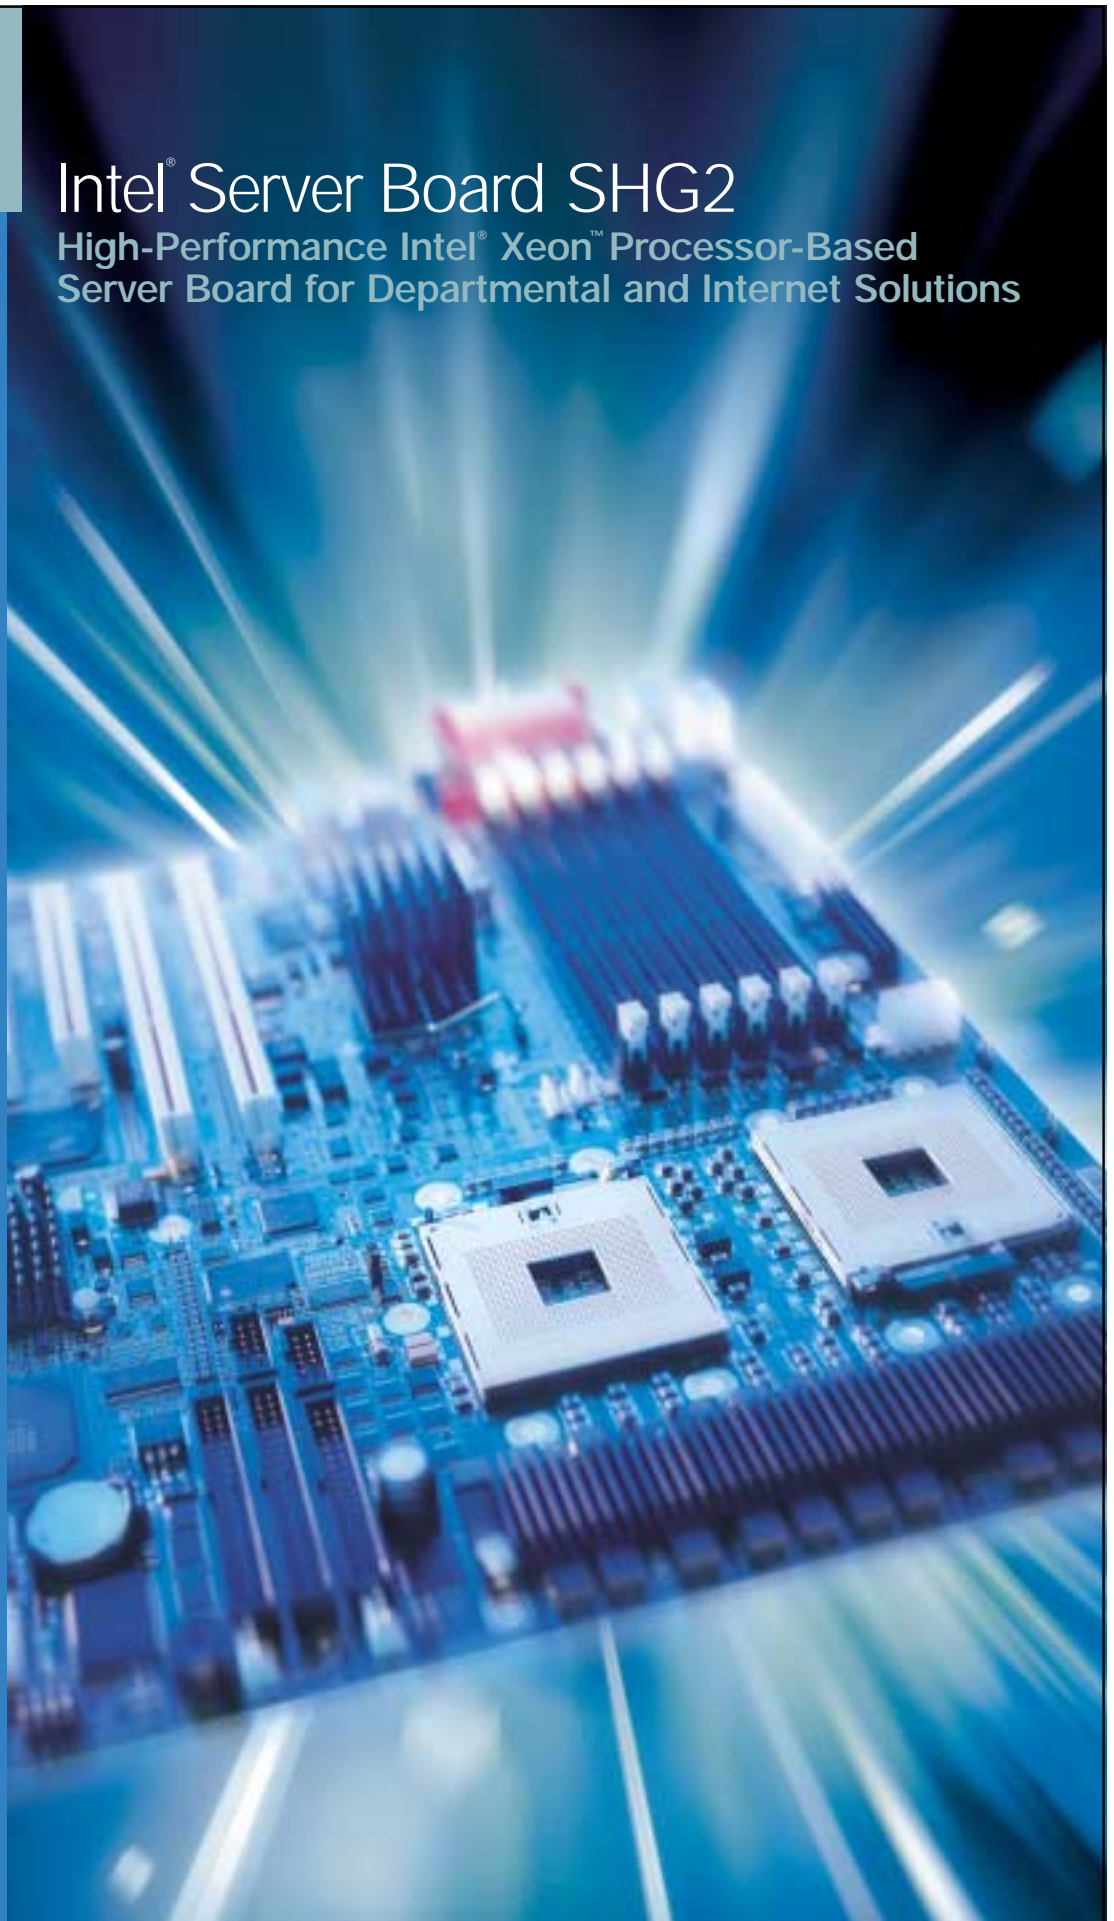

# A Manageable and Reliable Approach to High-End Performance

The Intel® Server Board SHG2 provides businesses an ideal solution to the challenges of building, running, and supporting departmental and Internet-driven applications. For performance, the board supports dual Intel® Xeon™ processors, dual-channel Ultra160 SCSI, dual integrated Intel® Server Network Connections (one Intel® PRO/100+ Server Network Connection and one Intel® PRO/1000 XT Network Connection), and registered ECC DDR200/266 SDRAM. It also provides triple-peer PCI buses and three PCI-X slots supporting speeds of up to 133 MHz.

## Designed Specifically for Evolving Applications

The Intel® Server Board SHG2 is a remarkably versatile board, having been validated for pedestal and rack configurations and with a number of third-party chassis to meet a variety of price points and features<sup>1</sup>. This makes the Server Board SHG2 an excellent solution for customers whose workgroup database, groupware, or secure Web-server applications must evolve and grow alongside the business.



Performance, reliability, manageability, and flexibility make the Intel® Server Board SHG2 a smart choice for you and your customers.

## Features

Support for one or two Intel® Xeon™ processors with 512KB Advanced Transfer cache and Hyper-Threading Technology

Support for up to 12 GB of registered ECC DDR200/266 SDRAM with six DIMM sockets

Dual (two-way) interleaved memory

Triple-peer PCI with PCI-X support

Six full-length PCI slots: up to one 64-bit/133MHz PCI-X, two 64-bit/100MHz PCI-X, and three 32-bit/33MHz

Two integrated Intel® Server Network Connections (one Intel® PRO/100+ Server Network Connection and one Intel® PRO/1000 XT Network Connection)

Dual-channel Ultra160 SCSI with modular ROMB support

Integrated ATI® Rage® XL video controller with 8 MB of video memory

Advanced Intel® Server Management including integrated in-band and out-of-band remote management, event alerting and logging, and proactive fault management

Three-year limited warranty

## Benefits

Processing performance for demanding server applications

Memory flexibility and capacity to support a wide range of server solutions

High-performance memory subsystem with up to 3.2 GB/sec of data transfer

Distributed I/O workload for boosting overall I/O throughput

Room to grow with support for high-performance PCI cards

Widespread compatibility, scalable bandwidth, and redundant links for excellent networking capabilities

Integrated high-performance I/O and option for low-cost RAID with Intel® RAID Controller SRCMR

High-quality video without the need for a video-adaptor card

Simplified troubleshooting and maintenance

Peace of mind

<sup>1</sup> See <http://support.intel.com/support/motherboards/server/> for a complete list of Intel and third-party chassis that are compatible with the Intel® Server Board SHG2.

# Intel® Server Board SHG2 for the Intel® Xeon™ Processor

Up to 12 GB of ECC registered  
DDR200/266 SDRAM  
Dual memory channels for up to  
3.2 GB/sec data transfer

Support for two Intel® Xeon™ processors with 512KB L2 cache

Advanced Intel® Server Management

Integrated  
dual-channel SCSI  
Adaptec® AIC-7899W  
Ultra160 SCSI Controller


Integrated graphics  
ATI® Rage® XL Graphics  
with 8 MB of memory

ServerWorks® Grand Champion  
LE chipset

Two integrated Intel® Server Network  
Connections  
One Intel® PRO/100+ Server Network Connection  
One Intel® PRO/1000 XT Network Connection

Triple-peer PCI buses

- Bus A: 64-bit/100MHz PCI-X
- Bus B: 64-bit/133MHz PCI-X
- Bus C: 32-bit/33MHz

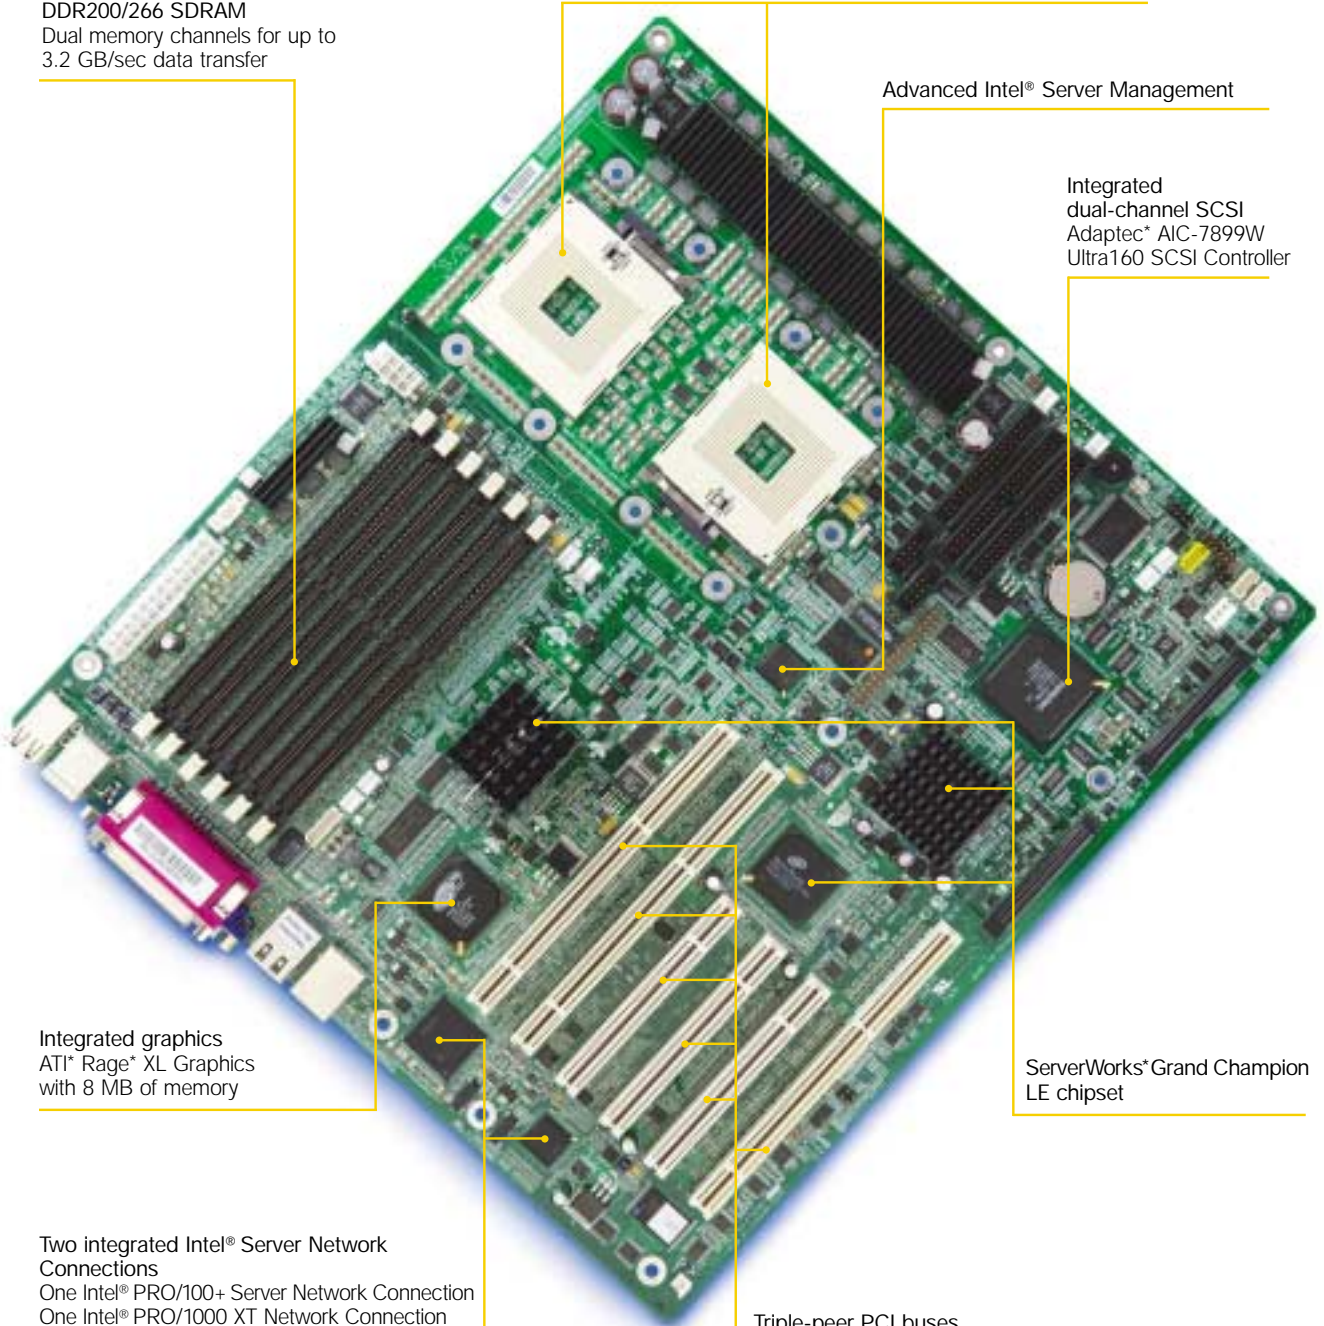

## The Boxed Intel® Server Board SHG2

---

Included for easy integration:

1. One Intel® Server Board SHG2
2. Quick Start User Guide
3. CD-ROM with Intel® Server Management software
4. Resource CD-ROM with software drivers, configuration tools, Intel® SMarT Tool software, and technical product information
5. Cable kit
6. SSI-compliant I/O shield
7. Board-layout sticker



## Build Value with Intel: Server Products, Programs, and Support

---



Intel is committed to providing industry-leading server building blocks, programs, and support services to help system integrators successfully compete in the evolving Internet economy. Get the high-value server solutions you need to succeed by taking advantage of the outstanding value Intel provides its system integrators:

- High-quality server building blocks
- Extensive breadth of server building blocks
- Solutions and tools to enable e-Business
- Comprehensive training services
- Worldwide 24x7 technical support
- World-class service, including a three-year limited warranty and Advanced Warranty Replacement

For more information on the Intel added-value server offerings, please visit: [www.intel.com/go/serverbuilder](http://www.intel.com/go/serverbuilder)

# Complete Your Intel® Server Board SHG2 with Intel® Server Building Blocks

Add the following Intel building blocks to your Intel Server Board SHG2 to ensure a highly reliable, available, and scalable server:



**Intel® Xeon™ Processors** provide a powerful foundation for business computing. They help to keep your business up and running by enabling you to cost-effectively manage growth by simply adding processors to your existing servers.



**Intel® Server Management** monitors key server components and solves many problems automatically with the help of integrated in-band and out-of-band remote management through LAN and modem connections, event alerting and logging through e-mail or paging devices, and proactive fault management. Intel Server Management is included with every boxed Intel® Server Board SHG2 at no additional cost.



**Intel® RAID Controllers** are designed to protect data, applications, and the server operating system from disk failures. Intel offers an affordable high-performance line of RAID products, all of them tested and validated for easy integration with Intel server building blocks.



**Intel® PRO Server Network Connections**, including Fast Ethernet and Gigabit Ethernet server adapters, help to reduce bottlenecks and improve availability with advanced performance and server features.



**Intel® Server Chassis SC5200** is designed specifically to work in tandem with the Intel® Server Board SHG2. Multiple options enable extensive customization of the Server Chassis SC5200, for example:

- A base configuration features five one-inch fixed-drive bays, five fans for ample cooling, and a 450W PFC power supply.
- A hot-swap redundant-power and fan pedestal configuration includes seven fans (five of which are hot-swap redundant), a hot-swap redundant drive bay with capacity for five one-inch-high SCSI hard drives, and 350W 2+1 dual line cord redundant power.
- A black rack-optimized redundant-power and fan version provides all the functionality of the redundant-power and fan pedestal version in an easy-to-install 5U rack-optimized chassis.
- An option for up to 10 hot-swap Ultra320 SCSI hard-drive bays boosts internal storage capacity to 730 GB<sup>2</sup>.



<sup>2</sup> At product introduction, based on support of 73GB drives. HDD capacity is expected to increase as new technology is introduced.

# Intel® Server Board SHG2 Specifications

## Processor/Cache

Processors Supported	Intel® Xeon™ processors with 512KB of integrated L2 cache and a 400MHz system bus. For the latest processor support, visit <a href="http://support.intel.com/support/motherboards/server">http://support.intel.com/support/motherboards/server</a>
----------------------	--

## System Memory

Memory Capacity	Six DIMM sockets for up to 12 GB of registered ECC DDR200/266 SDRAM (128MB to 2GB DIMMs supported; memory must be populated in pairs)
Memory Type	DDR200/266 (200MHz) registered SDRAM ECC, 184-pin gold-plated DIMMs
DIMM Sizes	128 MB, 256 MB, 512 MB, 1 GB, 2 GB
Memory Voltage	2.5 V only
Error Detection	Corrects single-bit errors, detects double-bit errors (using ECC memory), and supports Chipkill™ (multi-bit detect, multi-bit correct)

## Integrated On-Board

Chipset	ServerWorks® Grand Champion™ LE
Ultra160 SCSI Controller	Adaptec® AIC-7899W Dual Channel: two Ultra160/LVD channels (connected via two on-board internal 68-pin-wide connectors); maximum data transfer: 160 MB/sec on each Ultra160/LVD channel
Intel® Server Network Connections	One Intel® PRO/100+ Server Network Connection (Intel® 82544GC controller), one Intel® PRO/1000 XT Network Connection (Intel® 82550PM controllers); supports 10BASE-T and 100BASE-TX, RJ45 output
Graphics	ATI® RAGE™ XL SVGA PCI video controller with 8 MB of video memory
Super I/O Controller	National® PC87417VLA*

## Input/Output

PCI	Triple-peer PCI, with six slots: bus A: two 64-bit/100MHz, bus B: one 64-bit/133MHz, bus C: three 32-bit/33MHz
IDE	Two ATA-100 EIDE channels for a total of four IDE devices
USB	Three stacked USB connectors and one internal USB header
Serial Ports	Two asynchronous, RS-232C ports, one 9-pin serial connector on rear I/O panel and one 10-pin header on board
Floppy Controller	1.44 MB, 2.88 MB, 3-mode support
Keyboard/Mouse	PS/2, 8240A-compatible

## Intel® Server Management<sup>3</sup>

Remote Management	Remote access both in-band and out-of-band to system status, logs, configuration data, and utilities without the need for a remote-management card; event filtering and alerting through proactive LAN and mobile devices
System Monitoring and Auto Recovery	System health indicators and corrective actions including automated power cycling, OS watchdog timer, fault-resilient booting
Server Troubleshooting	Continuous health monitoring, text console redirection, error logs, and drive-predictive failure (out-of-band or in-band)
Server Maintenance	Integrated with Intel® SmaRT Tool Module for Server Board SHG2
Operating Systems Supported	Microsoft® Windows® 2000 Advanced Server, Red Hat® Linux®, Novell® Netware, Caldera® OpenUnix, Turbo Linux*

## Tested Operating Systems

Microsoft® Windows® 2000 Advanced Server, Red Hat® Linux®, Novell® Netware, Caldera® OpenUnix, Turbo Linux*
---

## System BIOS

BIOS Type	8Mb Flash EEPROM with Phoenix® BIOS, Multi-Processor Specification rev 1.4
Special Features	Plug and Play, IDE drive autoconfigure, SMBIOS 2.3, ECC/parity support, multilingual support
Configuration Utilities	System Setup Utility (SSU) for easy system setup of BIOS utilities, Plug and Play

## Jumpers and Front-Panel Connectors

Jumpers	CMOS clear, password clear
Front-Panel Connectors	Power LED, power on/off switch, reset switch

## Mechanical

Server Board Style	SSI Entry E-Bay 3.0
Server Board Size	12" x 13"

## Power Requirements

+5V	14.00 A maximum continuous current
+5V Standby	1.54 A minimum continuous current
+12V	25.50 A maximum continuous current
+3.3V	9.80 A maximum continuous current
-5V	0.00 A maximum continuous current
-12V	0.25 A maximum continuous current

## Environment

Ambient Temperature <sup>4</sup>	Operating (system): 5°C to 35°C; non-operating/storage (system): -40°C to +70°C
Relative Humidity	Non-operating: 95%, non-condensing at 30°C


## Safety Compliance

Europe	EN60950: CE Mark-EU Directive 73/23/EEC; GOST-R Mark
International	IEC60950
U.S. and Canada	UL/CUL 950-CSA 950 (UL Recognition Mark)

## Electromagnetic Compatibility (EMC) Compliance (Class A)

Based on a board configured in a compatible<sup>5</sup> Intel host system.

Australia/New Zealand	Verified to AS/NZS 3548, Class A (C-tick Mark)
Canada	Verified to ICES-003, Class A
Europe	Verified to EN55022, Class A, and EN55024 (CE Mark-EU Directive 89/336/EEC)
International	Verified to CISPR-22/VCCI, Class A
Japan	Verified to CISPR-22/VCCI, Class A
Korea	RRL Certification to MIC Notices 1997-41 & 1997-42
Russia	Verified to GOST-R Mark, Class A
Taiwan	Verified to BSMI CNS 13438, Class A
U.S.	Verified to FCC, Class A



## Order Codes

For information on the most recent product updates and their availability, visit <http://www.intel.com/go/serverbuilder>. For a complete list of Intel and third-party compatible chassis and adapter cards, visit <http://support.intel.com>.

Item	Product Order Code
Intel® Server Board SHG2	SHG2
Intel® Server Chassis SC5200 Base	KHD3BASE450
Intel® Server Chassis SC5200 Redundant-Power and Cooling (beige)	KHD3HSRP650
Intel® Server Chassis SC5200 Rack Optimized Redundant-Power and Cooling (black)	KHD3HSRP650R
Intel® Server Chassis SC5200 Rack Conversion Kit	AHD3RACK
Intel® Server Chassis SC5200 Spares Kit	FHD3SPRS
Intel® RAID Controller SRCU32	SRCU32U
Intel® RAID Controller SRCMR	SRCMRU

<sup>3</sup> Full usage of some server-management features requires the use of an Intel® Server Chassis.

<sup>4</sup> Environment ambient temperature is the system-intake measurement for an Intel® Server Board SHG2 installed in an Intel® Server Chassis SC5200.

<sup>5</sup> Compatible host system denotes the system(s) with which Intel tested the board and found it compliant.

For the most current product information on Intel server building blocks, visit: [www.intel.com/go/serverbuilder](http://www.intel.com/go/serverbuilder)

All products, dates, and figures specified are preliminary based on current expectations, provided for planning purposes only, and are subject to change without notice. Availability in different channels may vary. Information in this document is provided in connection with Intel products. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Intel's Terms and Conditions of Sale for such products, Intel assumes no liability whatsoever, and Intel disclaims any express or implied warranty, relating to sale and/or use of Intel products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright or other intellectual property right. Intel products are not intended for use in medical, life saving, or life sustaining applications. Intel may make changes to specifications and product descriptions at any time, without notice.

Intel, the Intel logo, and Intel Xeon are trademarks or registered trademarks of Intel Corporation or its subsidiaries in the United States and other countries.

\*Other names and brands may be claimed as the property of others.