

ViewSonic® VP171s/VP171b LCD Display

17" THINEDGE™ ULTRA-SLIM BEZEL DISPLAY



VP171b shown.
Also available in silver (VP171s)

Broaden your horizons with this ultra-narrow frame.

Whether you're a graphics professional, corporate executive or power gamer, the 17" VP171s and VP171b LCD displays will enhance your productivity and enjoyment. Their **THINEDGE™ ULTRA-SLIM BEZEL DESIGN** enable multiple-display configurations in immaculate digital HDTV clarity for powerful multi-tasking and mixed-media data analysis. XtremeView® wide viewing angles and ClearMotiv™ 16ms broadcast-quality video response ensure intense visual performance. Class-leading features include comprehensive **HEIGHT, PIVOT, TILT AND SWIVEL** adjustments and multiple digital/analog inputs. Step up to the 17" LCD display that sets the price/performance benchmark, the ViewSonic VP171s or VP171b.



ThinEdge design is ideal for multi-panel setups. Three unit panel-module-only (without base) multi-packs available.

Equipped like no other 17" LCD display.

❖ **ThinEdge maximizes your productivity**

The ultra-slim 0.67" bezel design enhances your visual experience with clean, minimalist borders around the active image area. Suitable for tiling and stacking.

❖ **Ideal for multiple-monitor setups**

ThinEdge minimizes bezel gaps between panels for a virtually continuous viewing area in multiple-panel setups.

❖ **Pivot, height and wall-mount versatility**

VESA® wall-mount interface and detachable base for ergonomic flexibility with pivot, height, tilt and swivel adjustments.

❖ **OPTISYNC multiple analog/digital inputs expand your connectivity**

Includes one DVI-D and two analog inputs for wide compatibility and optimization of a variety of video sources.

❖ **ClearMotiv technology**

Ultra-fast 16ms video response enables digital HD broadcast-quality full motion video at 62.5 fps.

❖ **Full 17" viewable screen**

❖ **1280x1024 optimum resolution**

❖ **High brightness and contrast**

260-nit brightness (typ) and 500:1 contrast ratio (typ).

❖ **HDTV-720p ready**

❖ **Image clarity from all directions**

XtremeView performance features super-wide 140° viewing angles horizontally and vertically.

❖ **Integrated power supply with hard power switch**

❖ **TCO'03 and ENERGY STAR® qualified**

TCO'03 for silver and TCO'99 for black models.



ViewSonic®
See the difference.®

ThinEdge

ViewSonic® VP171s/VP171b LCD Display

17" THINEDGE™ ULTRA-SLIM BEZEL DISPLAY




Pivot feature saves time

Spend less time scrolling long documents. Simply rotate your screen from landscape to portrait.




Wide-travel height adjustment

With over 4 1/4 inches of travel, this LCD fits just right.

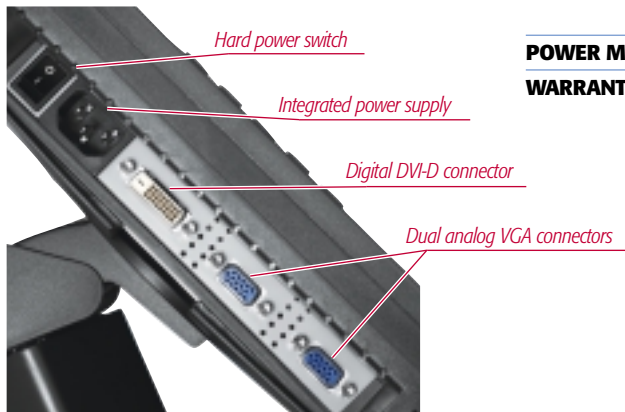

LCD PANEL	Type	17" color TFT active matrix SXGA LCD
	Display Area	13.3" (horizontal) x 10.6" (vertical); 17.0" diagonal
	Optimum Resolution	1280x1024
	Contrast Ratio	500:1 (typ)
	Viewing Angles	140° horizontal, 140° vertical
	Response Time	16ms (typ)
VIDEO INPUT	Analog	RGB Analog (75 ohms, 0.7/1.0 Vp-p)
	Digital	DVI-D (TMDS, 100 ohms)
	Frequency	Fh: 30~82kHz, Fv: 50~85Hz
	Sync	H/V separated (TTL), composite, sync-on-green
COMPATIBILITY	PC	VGA up to 1280x1024 non-interlaced
	Mac**	Power Mac™ G3/G4 up to 1280x1024
	HDTV	480p, 720p
CONNECTOR	Analog	15-pin mini D-sub
	Digital	Digital DVI-D
	Power	3-pin plug
POWER	Voltage	AC 100~240V (universal), 50~60Hz
	Consumption	33W (typ)
CONTROLS	Basic	Power, 1, down, up, 2
	OnView®	Auto image adjust, contrast, brightness, input select, color adjust (9300K, 6500K, 5400K, 5000K, user color), information (mode, model number, serial number), manual image adjust (H. size, H. position, V. position, fine tune, sharpness, scaling), setup menu (language, resolution notice, OSD position, OSD timeout, OSD background, touch tone), memory recall
OPERATING CONDITION	Temperature	32~104° F (0~40° C)
	Humidity	10~90% (non-condensing)
DIMENSIONS (W x H x D)	Physical:	392mm x 445mm x 238mm (w/ stand)
		15.4" x 17.5" x 9.4" (w/ stand)
		371mm x 309mm x 55.3mm (w/out stand)
		14.6" x 12.2" x 2.2" (w/out stand)
WEIGHT	Net	14.3 lbs. (6.5 kgs) (w/ stand); 9.2 lbs. (4.2 kgs) (w/out stand)
	Gross	18.7 lbs (8.5 kgs) (w/ stand); 12.6 lbs. (5.7 kgs) (w/out stand)
REGULATIONS		UL, cUL, FCC_B, CB, CE, NOM, TUV/GS, TUV Ergo, (covers ISO13406-2 and MPR II), TCO'03 (VP171s), TCO'99 (VP171b), NEMKO, SEMKO, DEMKO, FIMKO, GOST-R, Hygienic, SASO, PCBC, VCCI, BSMI, CCC, PSB, C-TICK, TUV-S
POWER MANAGEMENT		Meets TCO and ENERGY STAR® standards
WARRANTY		Three-year limited warranty on parts, labor and backlight.



ISO 9001:2000
FM 40187

ISO 14001:1996
FM 40968

ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by the British Standards Institution.



ViewSonic®
See the difference.™

ViewSonic Corporation • 381 Brea Canyon Road, Walnut, CA 91789

Phone (800) 888-8583 or (909) 444-8888 • In Canada (866) 262-1967 • Fax (909) 839-7922 • SalesInfo@ViewSonic.com • ViewSonic.com

*Adapter may be required. Analog adapter available from ViewSonic. Specifications subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. Corporate names, trademarks stated herein are the property of their respective companies. Copyright © 2003 ViewSonic Corporation. All rights reserved. [10963-02B-08/03] VP171s-1/VP171b-1

For more product information, visit us on the web at ViewSonic.com

specifications