

ViewSonic® VP191s/VP191b LCD Display

19.0" THINEDGE™ ULTRA-SLIM BEZEL DISPLAY



VP191b shown.
Also available in silver (VP191s)

An intensive visual experience without boundaries.

The innovative VP191s and VP191b LCD displays with **THINEDGE ULTRA-SLIM BEZEL DESIGN** are ideal for multiple-display configurations to enhance productivity, accuracy and decision-making for financial traders, corporate planners, graphics professionals and engineers. Digital HDTV clarity, 170° XtremeView® wide viewing angles and ClearMotiv™ video response deliver immaculate performance for high-density graphics and mixed-media data. Comprehensively equipped with **HEIGHT, PIVOT, TILT, AND SWIVEL** adjustments and multiple digital/analog inputs, the VP191s and VP191b set the world-class standard for professional flat-panel displays.



ThinEdge design is ideal for multi-panel setups. Four unit panel-module-only (without base) multi-packs available.

Style, functionality and versatility to optimize your options.

❖ ThinEdge maximizes your productivity

The ultra-slim 0.71" bezel design enhances your visual experience with clean, minimalist borders around the active image area. Suitable for tiling and stacking.

❖ Ideal for multiple-monitor setups

ThinEdge minimizes bezel gaps between panels for a virtually continuous viewing area in multiple-panel setups.

❖ Pivot, height and wall-mount versatility

VESA® wall-mount interface and detachable base for ergonomic flexibility with pivot, height, tilt and swivel adjustments.

❖ **OPTISYNC** multiple analog/digital inputs expand your connectivity

Includes one DVI-D and two analog inputs for wide compatibility and optimization of a variety of video sources.

❖ ClearMotiv technology

Super-fast 25ms video response for broadcast-quality full motion video at 40 fps.

❖ Full 19" viewable screen

❖ 1280x1024 native resolution

Incredible image detail for video and graphics. Sharpness function improves graphics and text at lower resolutions.

❖ High brightness and contrast

250-nit brightness (typ) and 600:1 contrast ratio (typ).

❖ Image clarity from all directions

❖ HDTV-720p ready

❖ Integrated power supply with hard power switch

❖ TCO'03 and ENERGY STAR®

TCO'03 for silver and TCO'99 for black models.



ThinEdge

ViewSonic®
See the difference.®

ViewSonic® VP191s/VP191b LCD Display


19.0" THINEDGE™ ULTRA-SLIM BEZEL DISPLAY



Pivot feature saves time
Spend less time scrolling long documents. Simply rotate your screen from landscape to portrait.



Wide-travel height adjustment
With over 4 1/4 inches of travel, this LCD fits just right.

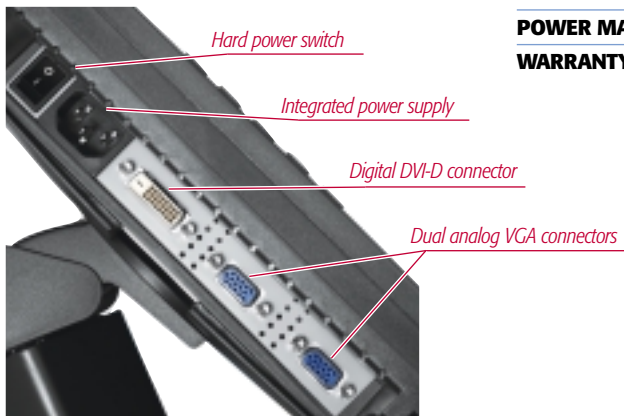

LCD PANEL	Type	19" color TFT active matrix SXGA LCD
	Display Area	14.8" (horizontal) x 11.9" (vertical); 19.0" diagonal
	Optimum Resolution	1280x1024
	Contrast Ratio	600:1 (typ)
	Viewing Angles	170° horizontal, 170° vertical
	Response Time	25ms (typ)
VIDEO INPUT	Analog	Two RGB Analog (75 ohms, 0.7/1.0 Vp-p)
	Digital	DVI-D (TMDS, 100 ohms)
	Frequency	Fh: 30~82kHz, Fv: 50~85Hz
	Sync	H/V separated (TTL), composite, sync-on-green
COMPATIBILITY	PC	VGA up to 1280x1024 non-interlaced
	Mac***	Power Mac™ G3/G4 up to 1280x1024
	HDTV	480p, 720p
CONNECTOR	Analog	15-pin mini D-sub x2
	Digital	Digital DVI-D
	Power	3-pin plug
POWER	Voltage	AC 100-240V (universal), 50-60Hz
	Consumption	35W (typ)
CONTROLS	Basic	Power, 1, down, up, 2
	OnView®	Auto image adjust, contrast, brightness, input select, color adjust (9300K, 6500K, 5400K, 5000K, user color), information (mode, model number, serial number), manual image adjust (H. size, H. position, V. position, fine tune, sharpness, scaling), setup menu (language, resolution notice, OSD position, OSD timeout, OSD background, touch tone), memory recall
OPERATING CONDITION	Temperature	32-104° F (0-40° C)
	Humidity	10-90% (non-condensing)
DIMENSIONS (W x H x D)	Physical:	416mm x 460mm x 238mm (w/ stand)
		16.4" x 18.1" x 9.4" (w/ stand)
		416mm x 341mm x 55.3mm (w/out stand)
		16.4" x 13.4" x 2.2" (w/out stand)
WEIGHT	Net	16.5 lbs. (7.5 kgs) w/ stand; 11.2 lbs. (5.1 kgs) w/out stand
	Gross	20.9 lbs. (9.5 kgs) w/ stand; 14.5 lbs. (6.6 kgs) w/out stand
REGULATIONS	UL, cUL, FCC_B, CB, CE, ENERGY NOM, TUV/GS, TUV Ergo, (covers ISO13406-2 and MPR II), TCO'03 (VP191s), TCO'99 (VP191b), NEMKO, SEMKO, DEMKO, FIMKO, GOST-R, hygienic, SASO, PCBC, VCCI, BSMI, CCC, PSB, C-TICK, TUV-S	
POWER MANAGEMENT	Meets TCO and ENERGY STAR® standards	
WARRANTY	Three-year limited warranty on parts, labor and backlight.	

specifications



ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by the British Standards Institution.



ViewSonic®
See the difference.™

ViewSonic Corporation • 381 Brea Canyon Road, Walnut, CA 91789

Phone (800) 888-8583 or (909) 444-8888 • In Canada (866) 262-1967 • Fax (909) 839-7922 • SalesInfo@ViewSonic.com • ViewSonic.com

*Adapter may be required. Analog adapter available from ViewSonic. Specifications subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. Corporate names, trademarks stated herein are the property of their respective companies. Copyright © 2003 ViewSonic Corporation. All rights reserved. [10965-03B-10/03] VP191s-1/VP191b-1

For more product information, visit us on the web at ViewSonic.com